

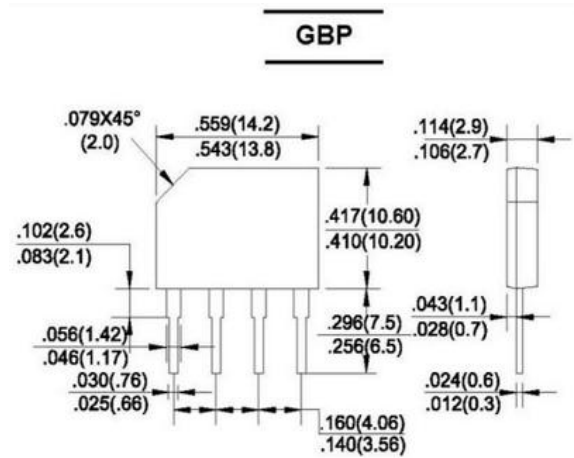


Features

- Glass passivated chip junction
- Ideal for surface mounted applications
- Low leakage
- High forward surge current capability
- High temperature soldering guaranteed:
260°C/10 seconds at terminals

Mechanical Data

- Case: Molded plastic body
- Epoxy: UL94V-0 rate flame retardant
- Polarity: Molded on body
- LeadP: Plated terminals solderable per MIL-STD-202E method 208C
- Weight: 0.039 ounce, 1.1gram



Dimensions in inches and (millimeters)

Maximum Ratings and Electrical Characteristics

- Ratings at 25°C ambient temperature unless otherwise specified
- Single Phase, half wave, 60Hz, resistive or inductive load
- For capacitive load derate current by 20%

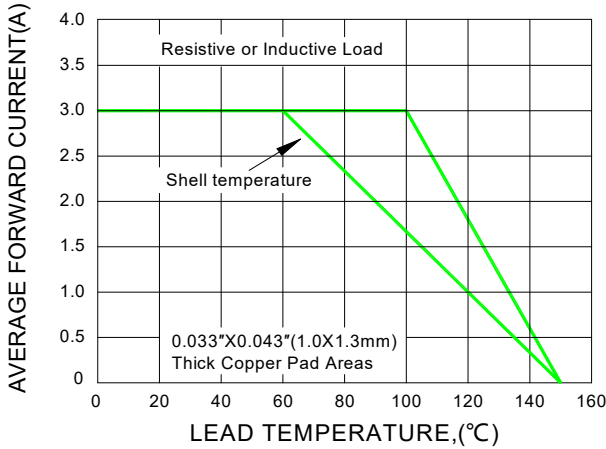
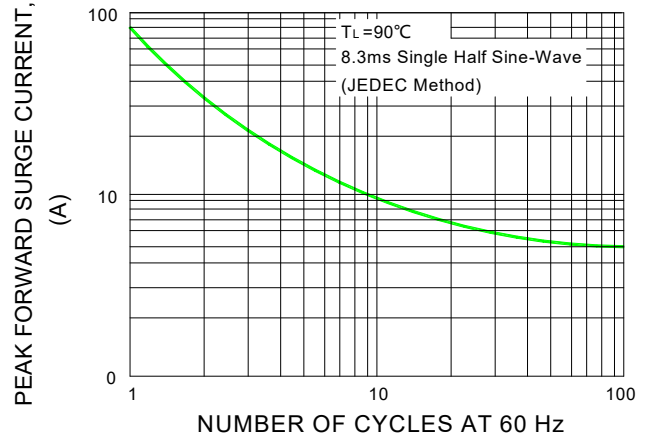
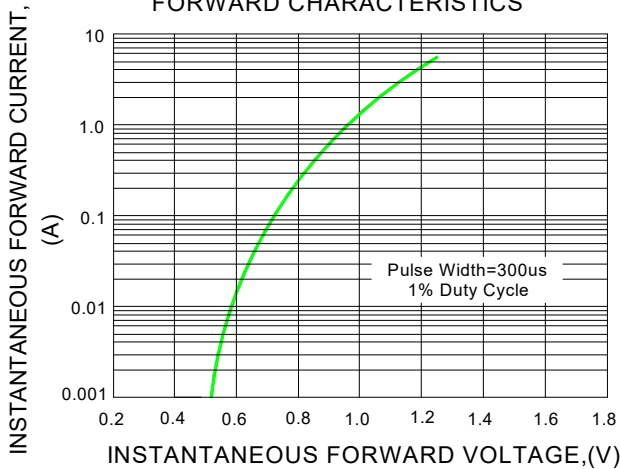
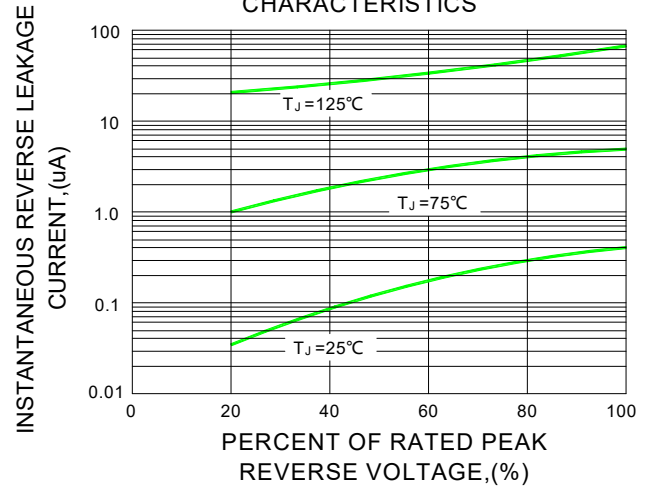
TYPE NUMBER	SYMBOLS	GBP 3005	GBP 301	GBP 302	GBP 304	GBP 306	GBP 308	GBP 310	UNIT
Maximum Reverse Peak Repetitive Voltage	V_{RRM}	50	100	200	400	600	800	1000	Volts
Maximum RMS Voltage	V_{RMS}	35	70	140	280	420	560	700	Volts
Maximum DC Blocking Voltage	V_{DC}	50	100	200	400	600	800	1000	Volts
Maximum Average Forward Rectified Output Current, 0.06"(1.5mm) lead length at $T_C=100^\circ C$	$I_{(AV)}$	3.0							Amps
Peak Forward Surge Current 8.3ms single half sine wave superimposed on rated load (JEDEC Method)	I_{FSM}	80							Amps
Rating for Fusing ($t < 8.3ms$)	I^2t	23							A ² s
Maximum Instantaneous Forward Voltage drop Per Bridge element 3.0A	V_F	1.1							Volts
Maximum Reverse Current at rated DC blocking voltage per element	$T_A=25^\circ C$	10							μAmps
	$T_A=100^\circ C$	50							
Typical Thermal Resistance (NOTE 2)	$R_{\theta JC}$	6							°C/W
	$R_{\theta JL}$	5							°C/W
	$R_{\theta JA}$	42							°C/W
Operating and Storage Temperature Range	T_J, T_{STG}	(-55 to +150)							°C

Notes:

1. Measured at 1.0MHz and applied reverse voltage of 4.0 Volts.
2. Unit mounted on P.C.B. with 0.033"x0.043"(1.00mm×1.30mm) copper pads.



Ratings and Characteristic Curves (TA=25°C unless otherwise noted)

F1G.1-FORWARD CURRENT DERATING CURVE**F1G.2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT****F1G.3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS****F1G.4-TYPICAL REVERSE CHARACTERISTICS****F1G.5-TYPICAL JUNCTION CAPACITANCE**